

FIG. 1

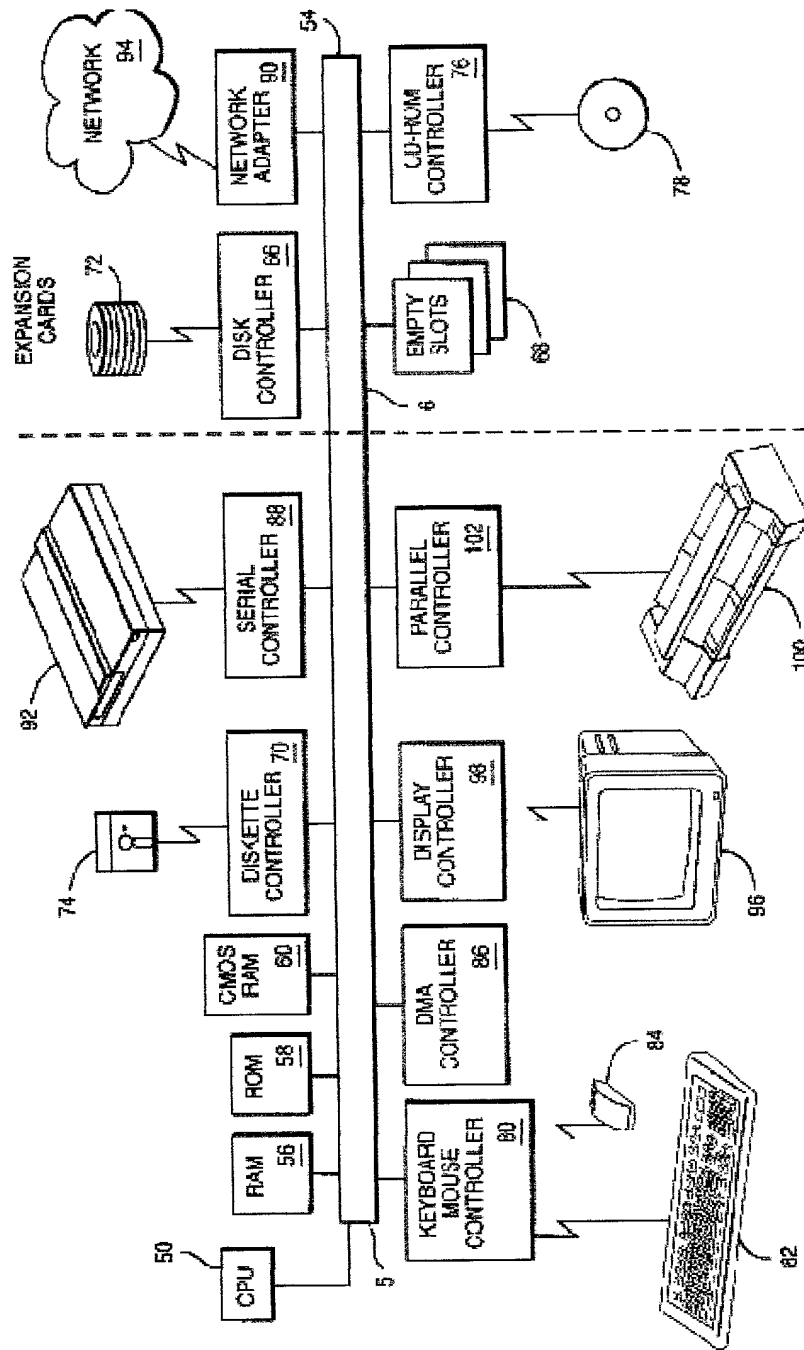


FIG. 2

2/10 IBM
Docket No.
AUS9-2000-
0697-US1

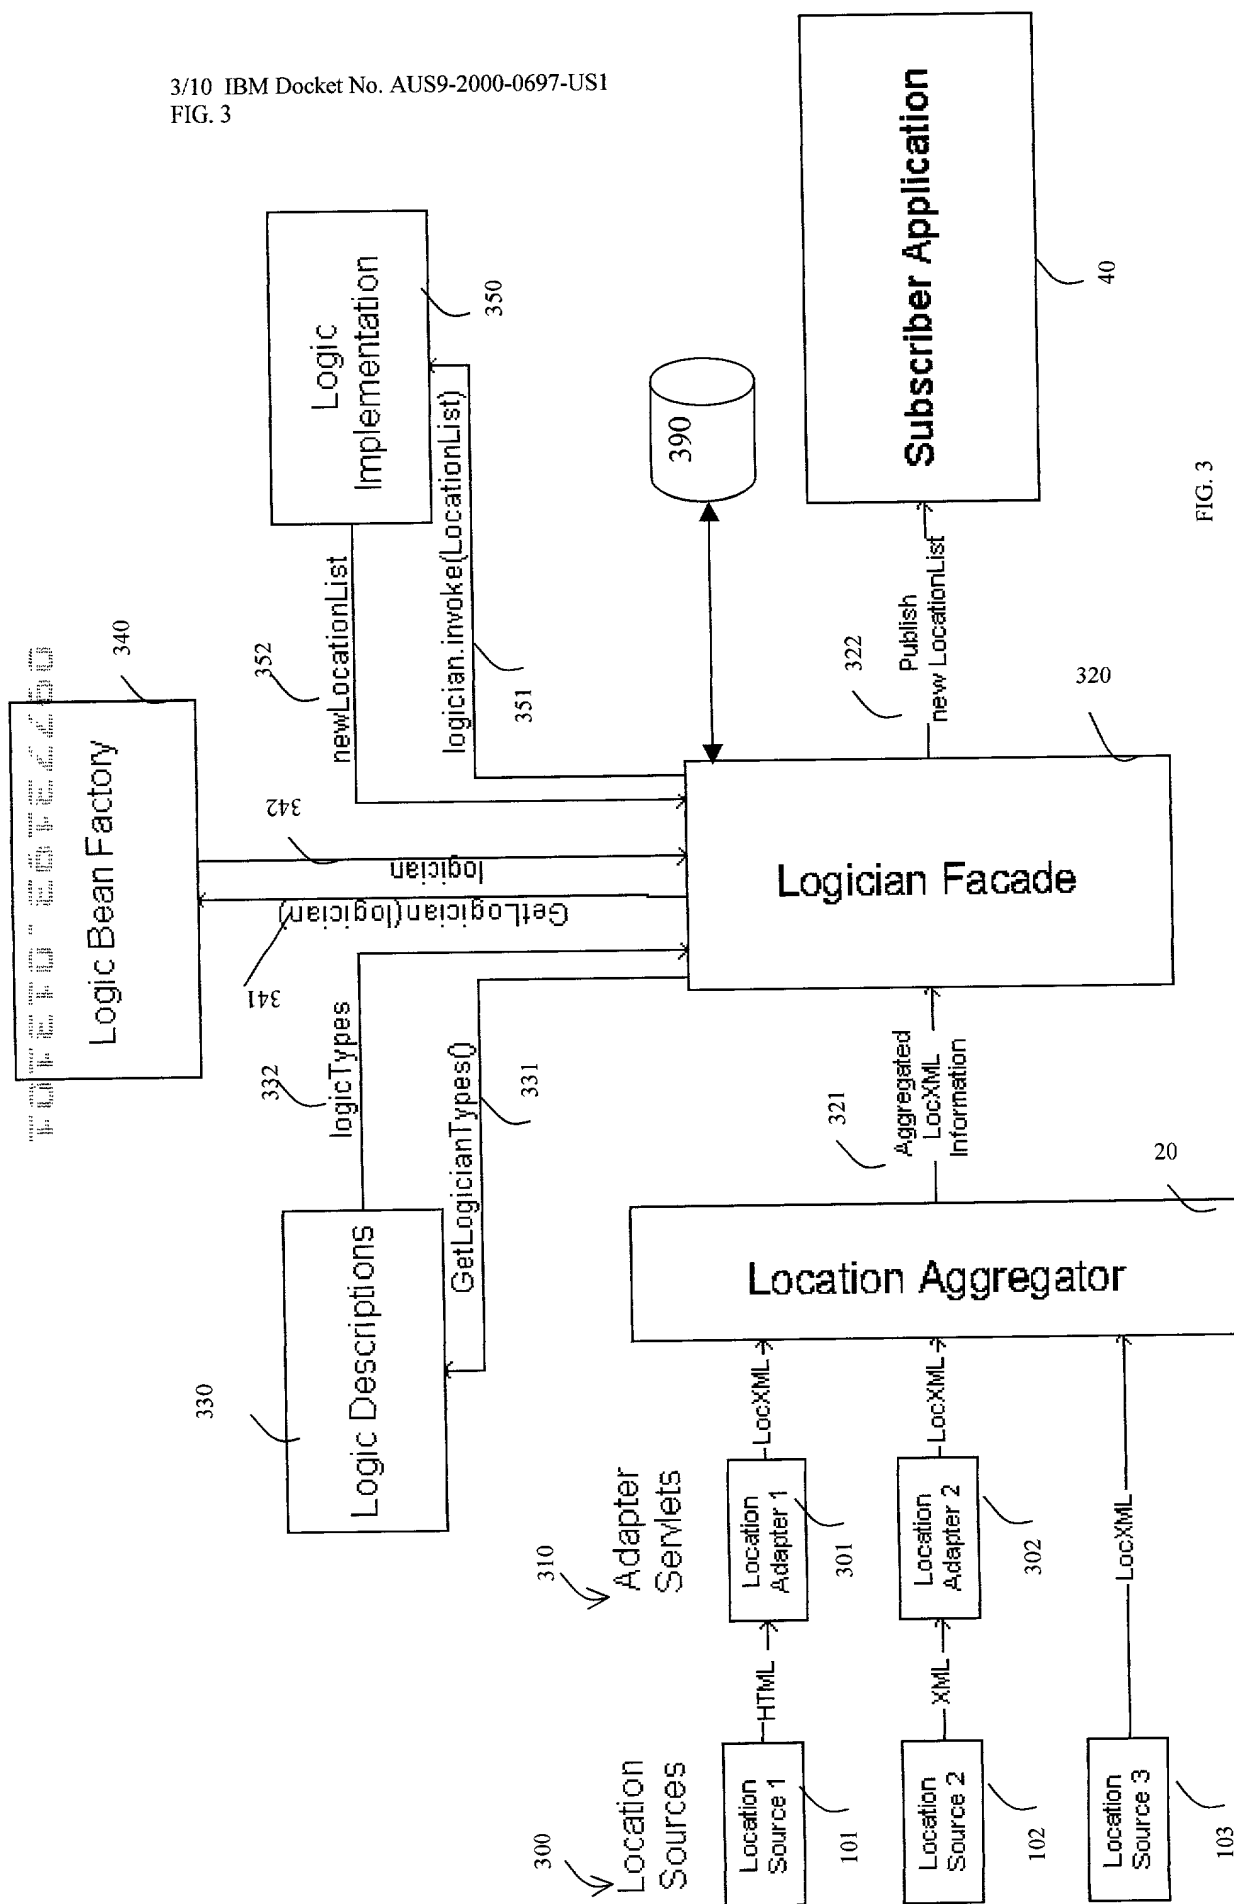


FIG. 3

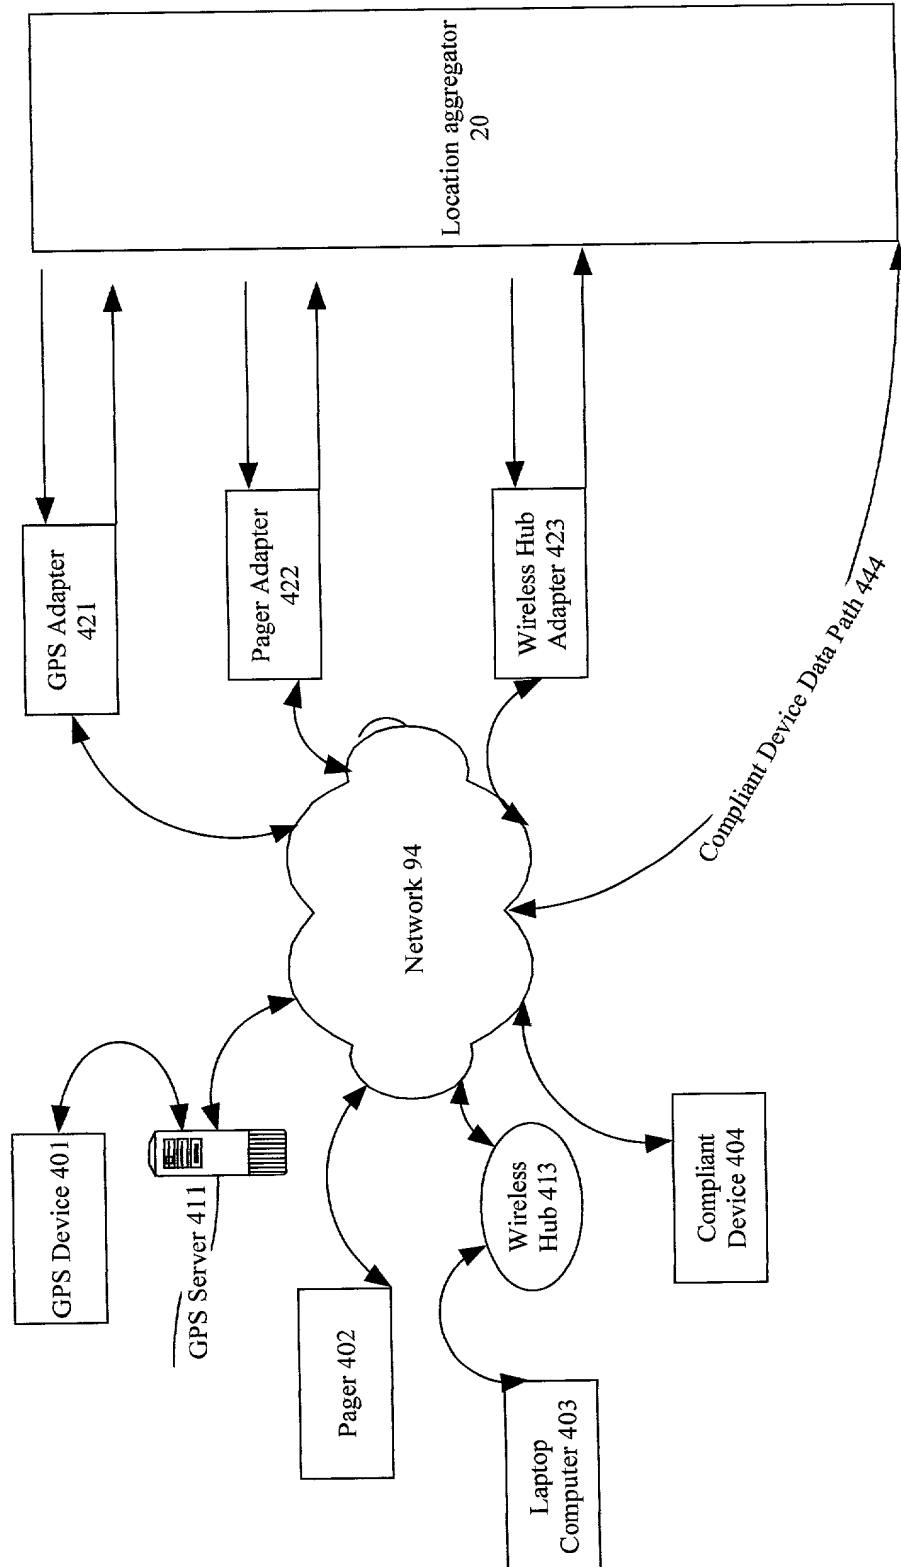


FIG. 4

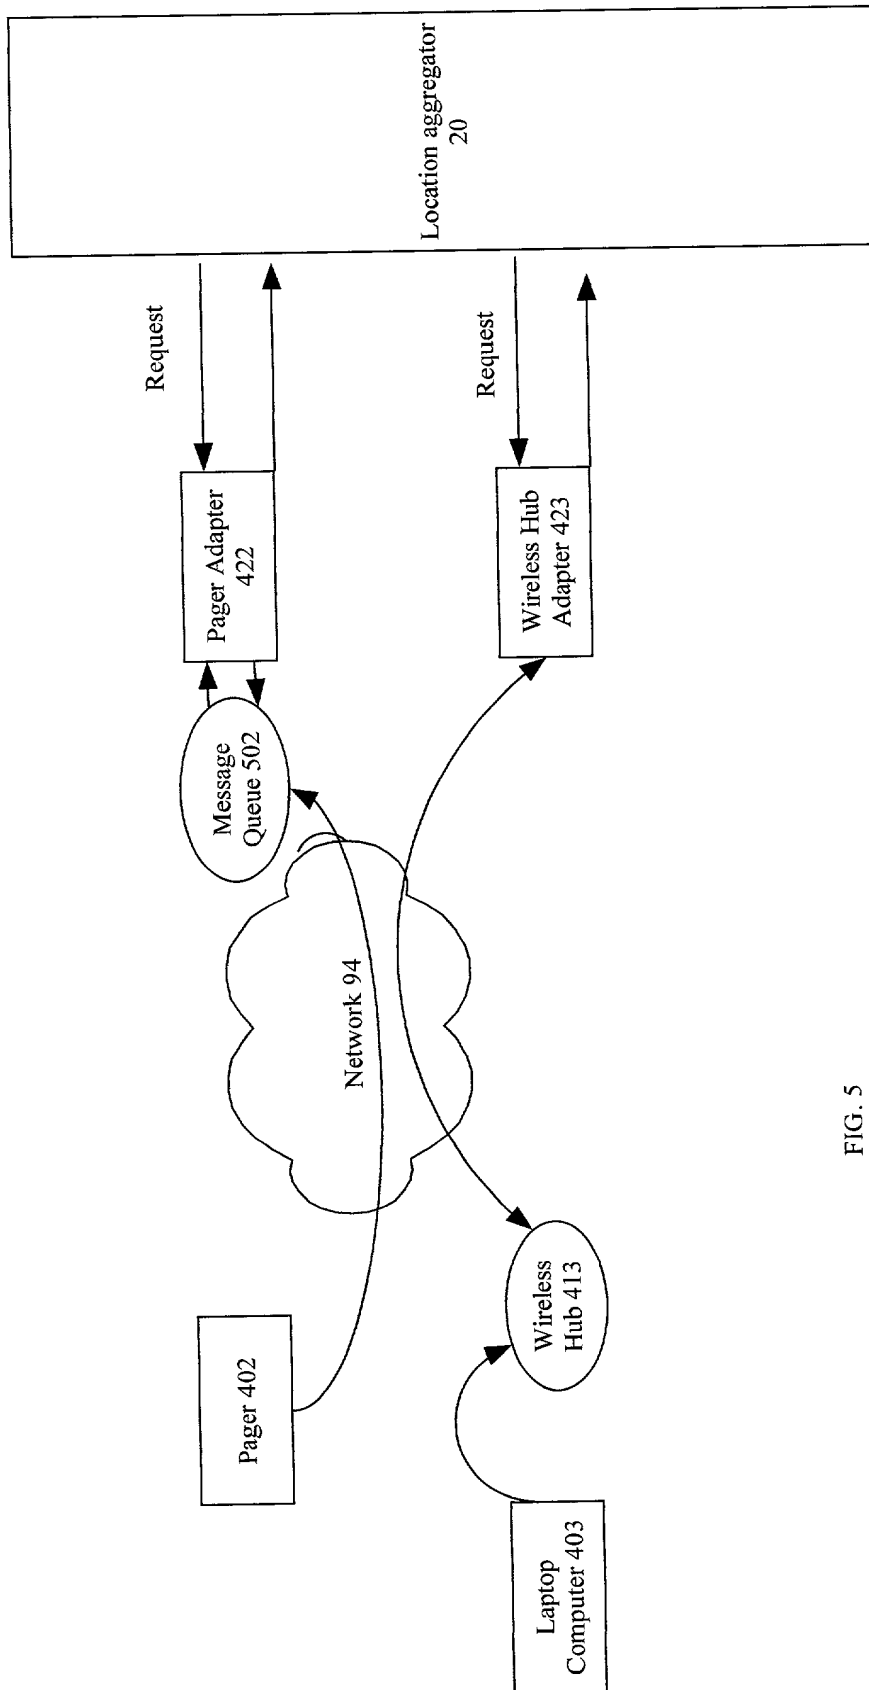


FIG. 5

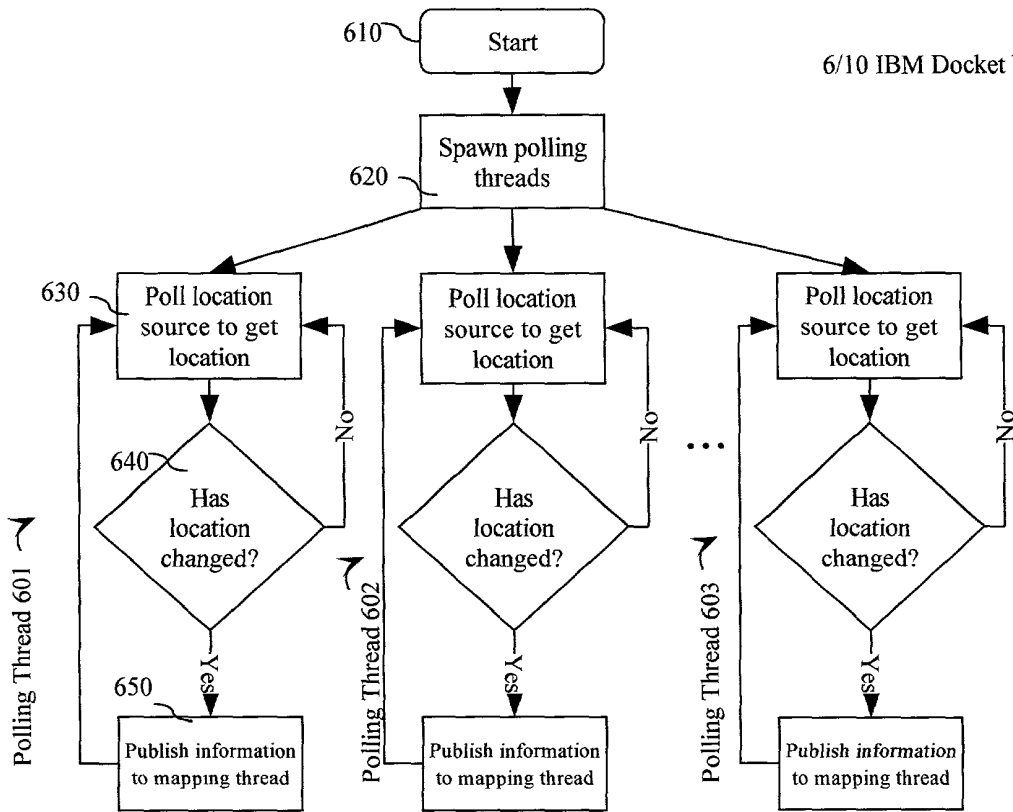


FIG. 6

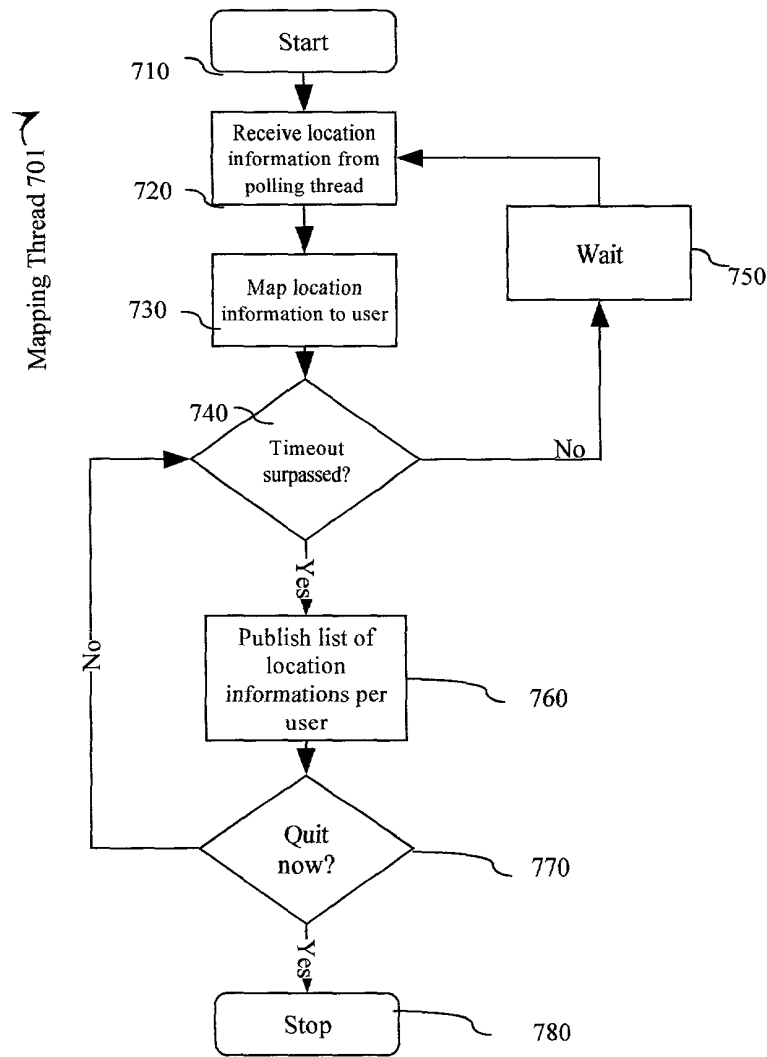


FIG. 7

```

- <LocationInformation>
- <MobileDevice TrackID="1234567890" RequestTime="20000626115751+-0800" ErrorCode="0">
- <Geographic Velocity="0" PositionTime="20000626115751+-0800">
- <GeodeticDatum>
- <WGS-84>
- <LatLong PositionFormat="IDMS0" Latitude="N374820" Longitude="W1222738" />
- <GeodeticDatum>
- <HeightDatum HeightFormat="meters" HeightValue="500" />
- <Region RadiusFormat="meters" InnerRadius="0" OuterRadius="100" StartAngle="0" StopAngle="360"
LevelOfConfidence="100" />
- <Geographic>
- <TowerID PositionTime="20000626115751+-0800" Name="95110" Type="ZIP" />
- <MobileDevice>
- </LocationInformation>

```

811

832

833

871

872

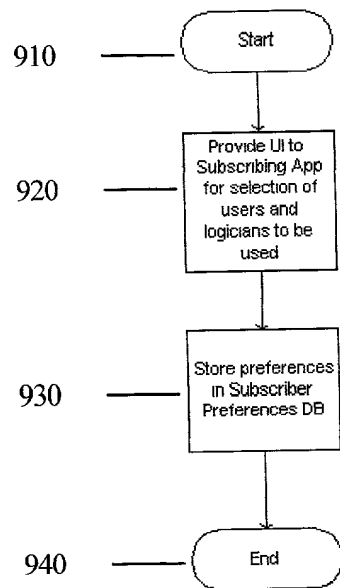


FIG. 9


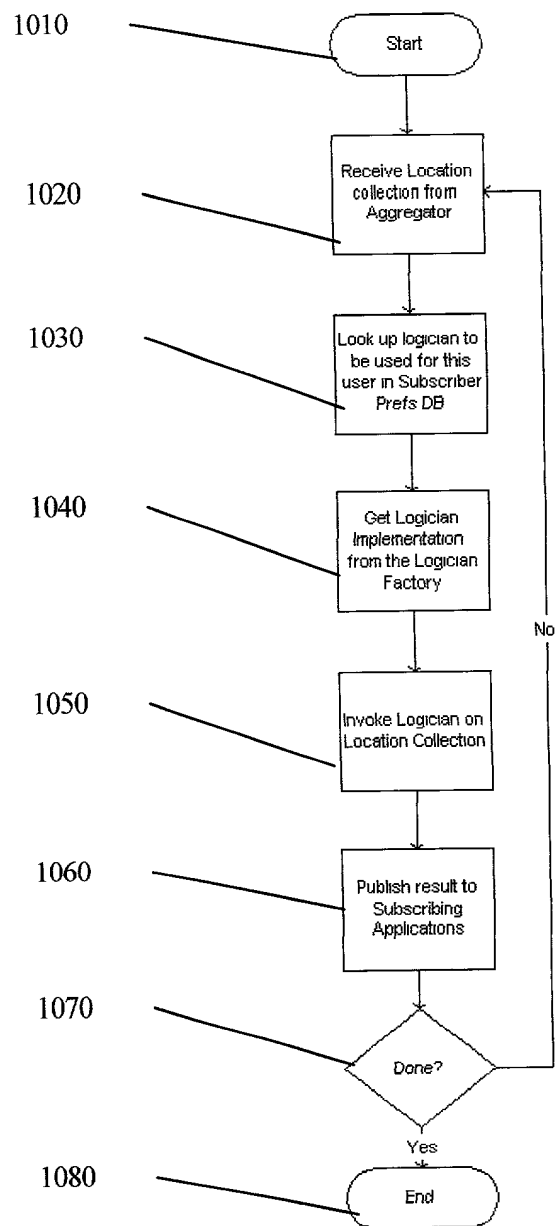


FIG. 10

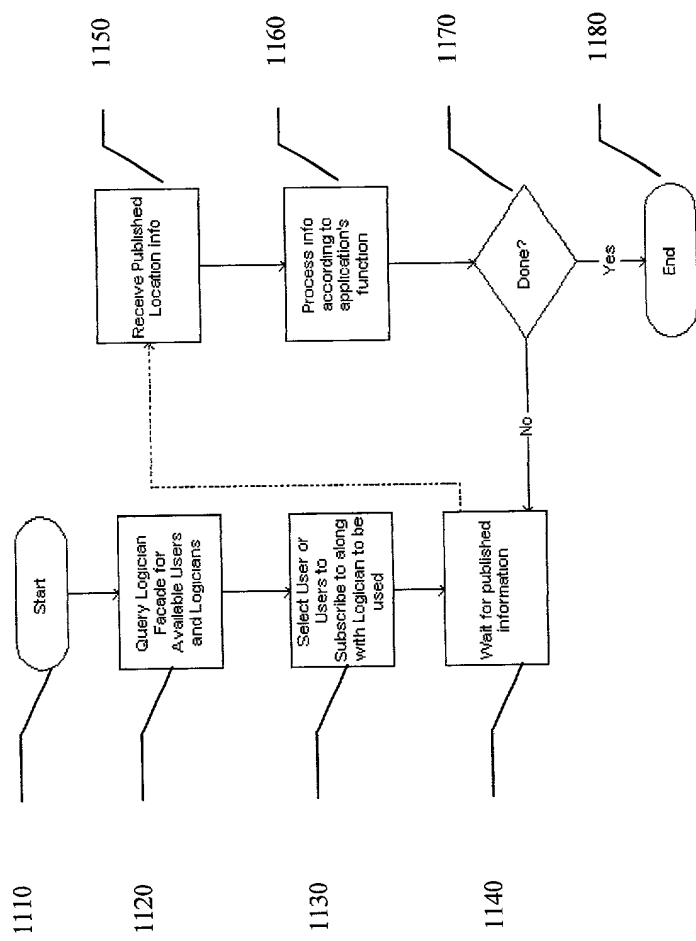

10/10 IBM Docket
No. AUS9 -2000-
0697-US1

FIG. 11